

An excellent alternative to traveling wave tube amplifiers, POAM – PA34G36G250V5 is a solid-state Power Amplifier with an operating range of 34-36 GHz while achieving a minimum of 54 dBm (250 Watts) of instantaneous saturated power. With its maximum performance in gain, efficiency, signal flatness, and RF output power, this SSPA is the ideal building block for millimeter-wave sub-systems with wide-ranging applications.

Product Features

- Frequency Range: 34– 36 GHz
- Saturated Power: 54 dBm
- Solid State MMIC Reliability
- Multi-Element Redundancy
- Instant On (no warm-up)
- IP66 protection
- low weight (only 17kg)
- small in size: 320 x 283 x 205 mm

Application:

- Radar
- Satellite communication
- TWTA Replacement





Solid State Power Amplifier 250W Ka-band




Part No.: PA34G36G250V5

Electrical Specifications

Parameter	Min	Typ.	Max	Units
Frequency	34		36	GHz
Output Power (Pulsed, PIN = 0 dBm)		54		dBm
Input Power (Pulsed)	-2	0	+6	dBm
Gain Flatness vs Freq. (Pulsed, PIN = 0 dBm)		0.6		dB
Pulse Droop (PW=50 us, F=35 GHz, PIN=0 dBm)				
-40 C		0.7		dB
+25 C		0.8		dB
+55 C		1.0		dB
+75 C		1.6		dB
Rise/Fall Time (PW=20 ns, F=35 GHz, PIN=0 dBm)				
-40 C		5.0 / 2.9		ns
+25 C		5.8 / 3.1		ns
+55 C		6.4 / 3.1		ns
+75 C		9.3 / 3.4		ns
Input Return Loss (CW)		13		dB
DC Power (average)		1100		W
Input RF Interface J1	WR-28 Waveguide			
Output RF Interface J2	WR-28 Waveguide			
Auxiliary Interface J5	D38999/20WB35SN MPHENOL			
Power Interface J3 & J4	D38999/20WD18PN AMPHENOL			
Total Weight	17			kg
Total Dimensions (L) x (W) x (H)	320 x 283 x 205			millimeters
IP Rating	IP66			
Cooling	Heatsink & Forced Air fan (IP68)			



Typical Performance

Conditions unless otherwise specified: $V_D = +28\text{ V}$, $I_{DQ} = 6\text{ A}$, $P_{IN} = 0\text{ dBm}$, Pulse Width = 5 μs , Duty Cycle = 50%

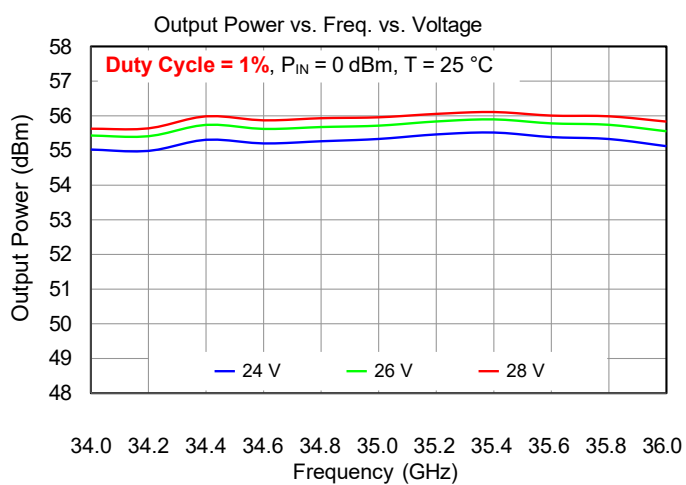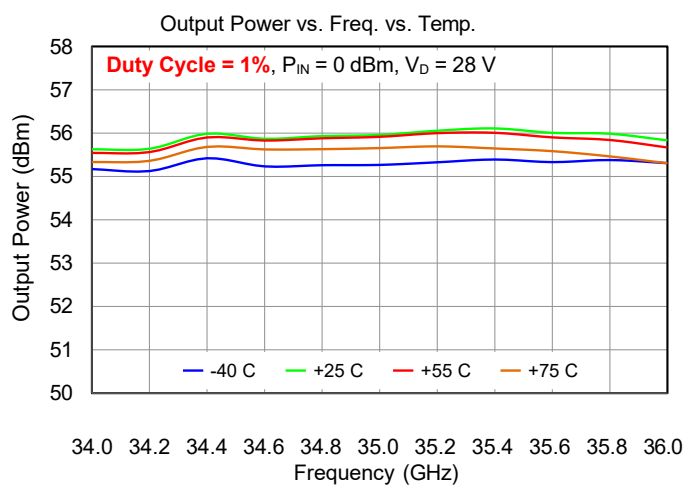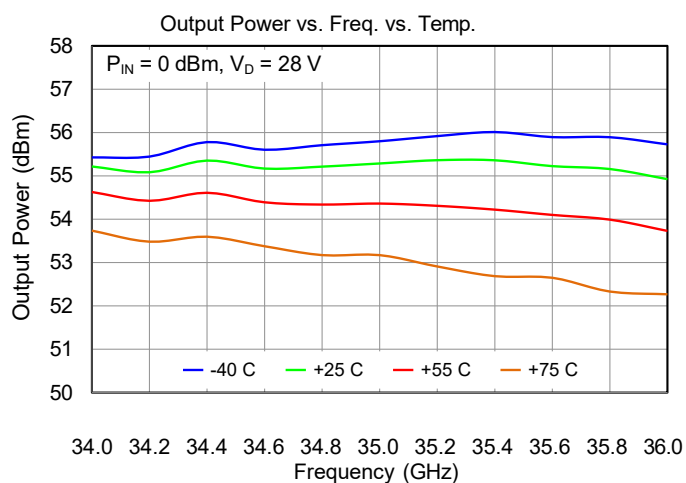

Typical Performance


Conditions unless otherwise specified: $V_D = +28\text{ V}$, $I_{DQ} = 6\text{ A}$, $P_{IN} = 0\text{ dBm}$, Pulse Width = 5 μs , Duty Cycle = 50%

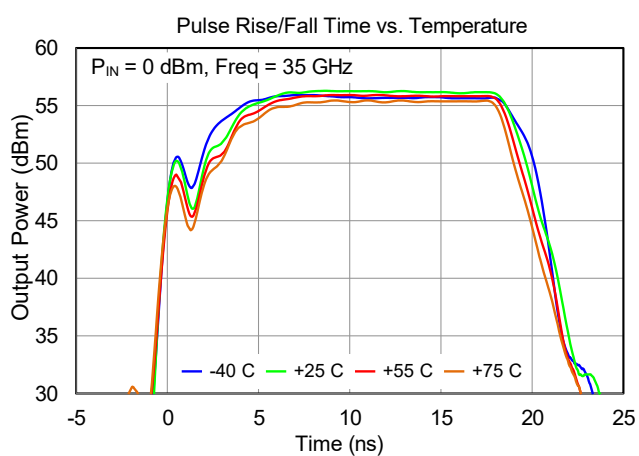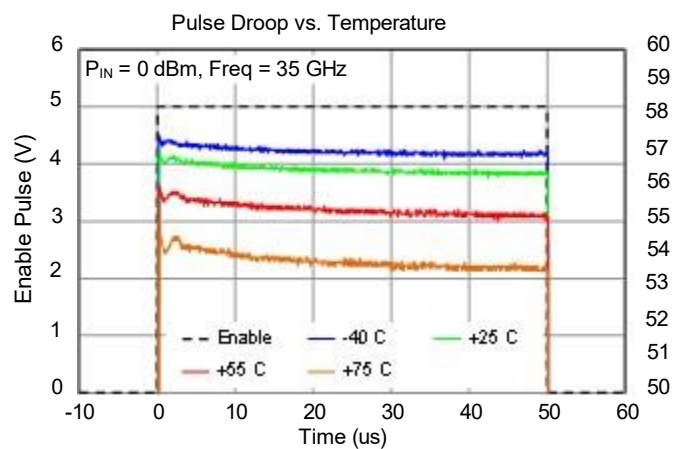


Typical Performance

Conditions unless otherwise specified: $V_D = +28\text{ V}$, $I_{DQ} = 6\text{ A}$, $PIN = 0\text{ dBm}$, Pulse Width = 5 μs , Duty Cycle = 50%


S21 vs. Frequency vs. Temperature

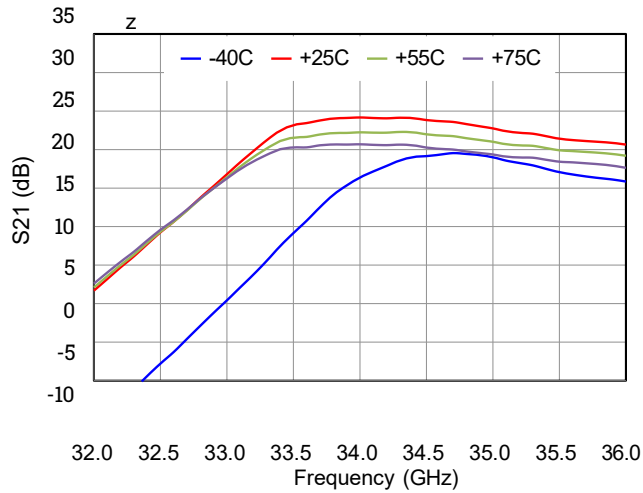


S21 vs. Frequency vs. Voltage

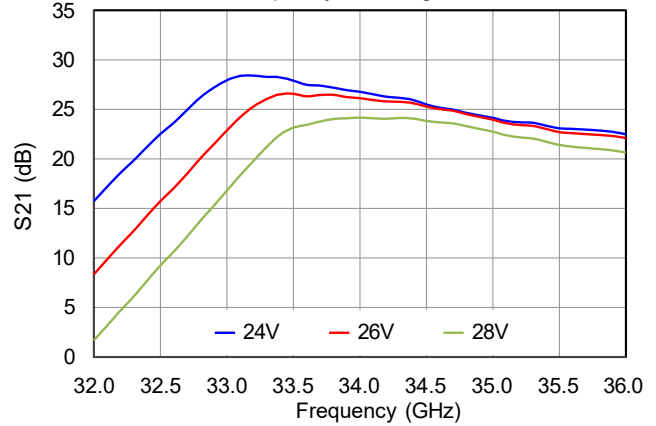

S11 vs. Frequency vs. Temperature

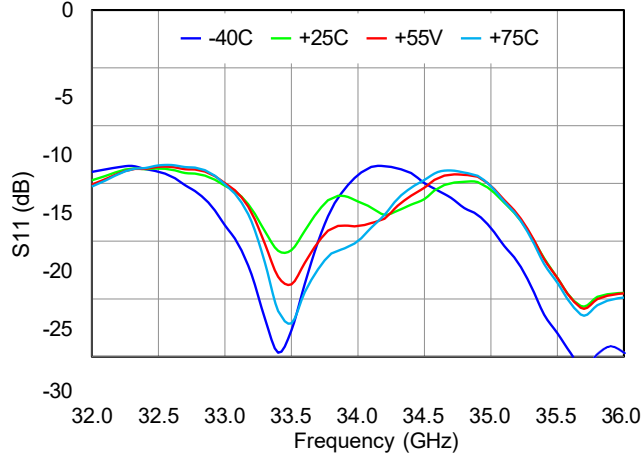

S11 vs. Frequency vs. Voltage


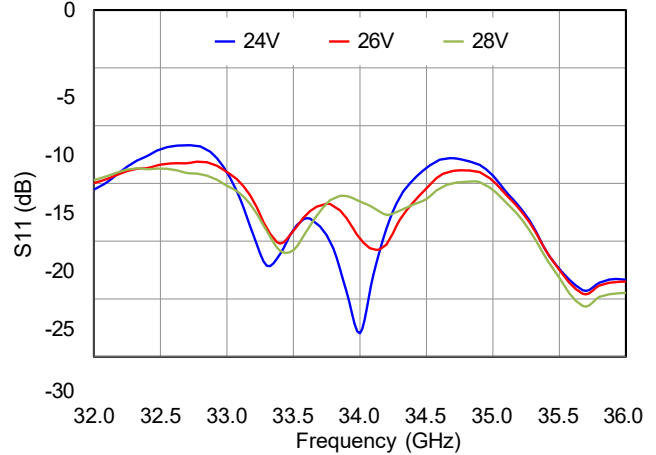




SOLID STATE POWER AMPLIFIER 250W KA-BAND

PART NO.: PA3436250V5

Reliability Information

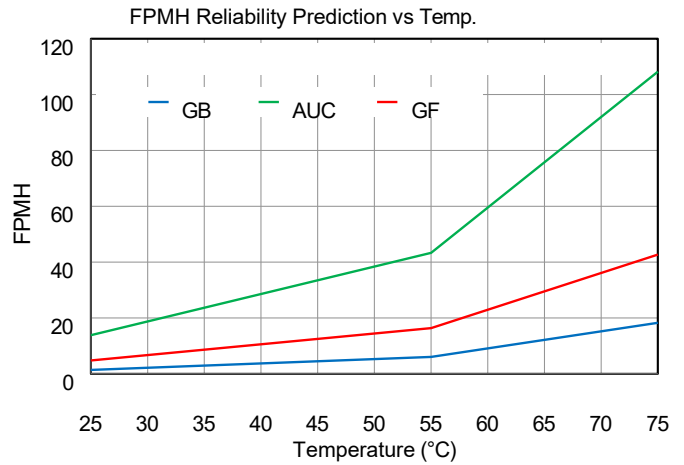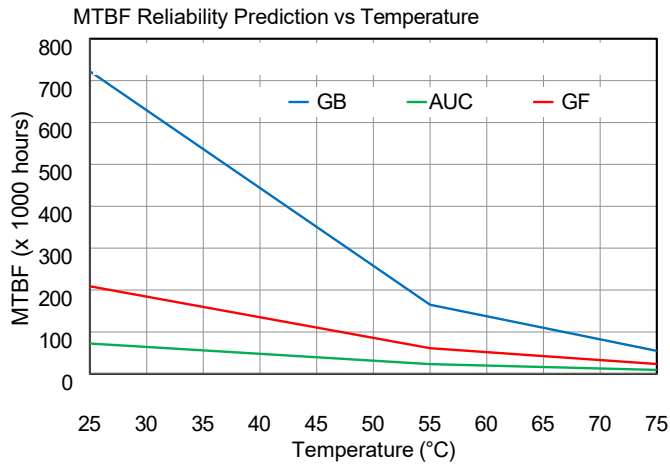

Calculations derived from MIL-HDBK-217F Operational

environments are:

GB – Ground Benign GF

– Ground Fixed

AUC – Airborne Uninhabited Cargo

Connectors pins layout

Auxiliary connector PIN-OUT for J5:

Connector name/type: D38999/20WB35SN (AMPHENOL 13 pins circular connector)

J5 AUXILIARY			
SSPA AUXILIARY	PIN	SIGNAL	
	1	RS422 Tx+	Heath, Temp, Voltage, and current monitoring
	2	RS422 Tx-	
	3	RS422 Rx+	
	4	RS422 Rx-	
	5	RS422 Tx+	Enable and disable SSPA 5V logic command bit to turn on/off the drain voltage. 0V puts the unit into a low-power state while 5V will allow normal operation. In the absence of an external logic signal (open), the amplifier will power on with the application of the supply voltage.
	6	RS422 Tx-	
	7	RS422 Rx+	
	8	RS422 Rx-	
	9	Logic ground	
	10	Logic ground	
	11	Free	
	12	Free	
	13	Free	



SOLID STATE POWER AMPLIFIER 250W KA-BAND

PART NO.: PA3436250V5

Connector PIN-OUT for J3 & J4:

Connector name/type: D38999/20WD18PN (AMPHENOL 18 pins circular connector)

J3 & J4 POWER PIN-OUT		
SSPA POWER	PIN	SIGNAL
	1	+28VDC
	2	+28VDC
	3	+28VDC
	4	+28VDC
	5	+28VDC
	6	+28VDC
	7	+28VDC
	8	+28VDC
	9	+28VDC
	10	GND
	11	GND
	12	GND
	13	GND
	14	GND
	15	GND
	16	GND
	17	GND
	18	GND



SOLID STATE POWER AMPLIFIER 250W KA-BAND

PART NO.: PA3436250V5

Handling Precautions



Caution!
ESD-Sensitive Device

RF VOLTAGE HAZARD: Contact with RF fields at the output connector can cause burns or electric shock. High levels of RF/Microwave energy may be present when the unit is operating.

HIGH DC CURRENT HAZARD: High levels of DC current are present when the unit is operating.

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.poamelectronics.com

Tel: +44 (0) 161 52 64 551

Email: sales@poamelectronics.com

Important Notice

The information contained herein is believed to be reliable; however, POAM makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for POAM products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND POAM HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Poam products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2024 © Poam, ltd. | POAM is a registered trademark of POAM Electronics Ltd.